
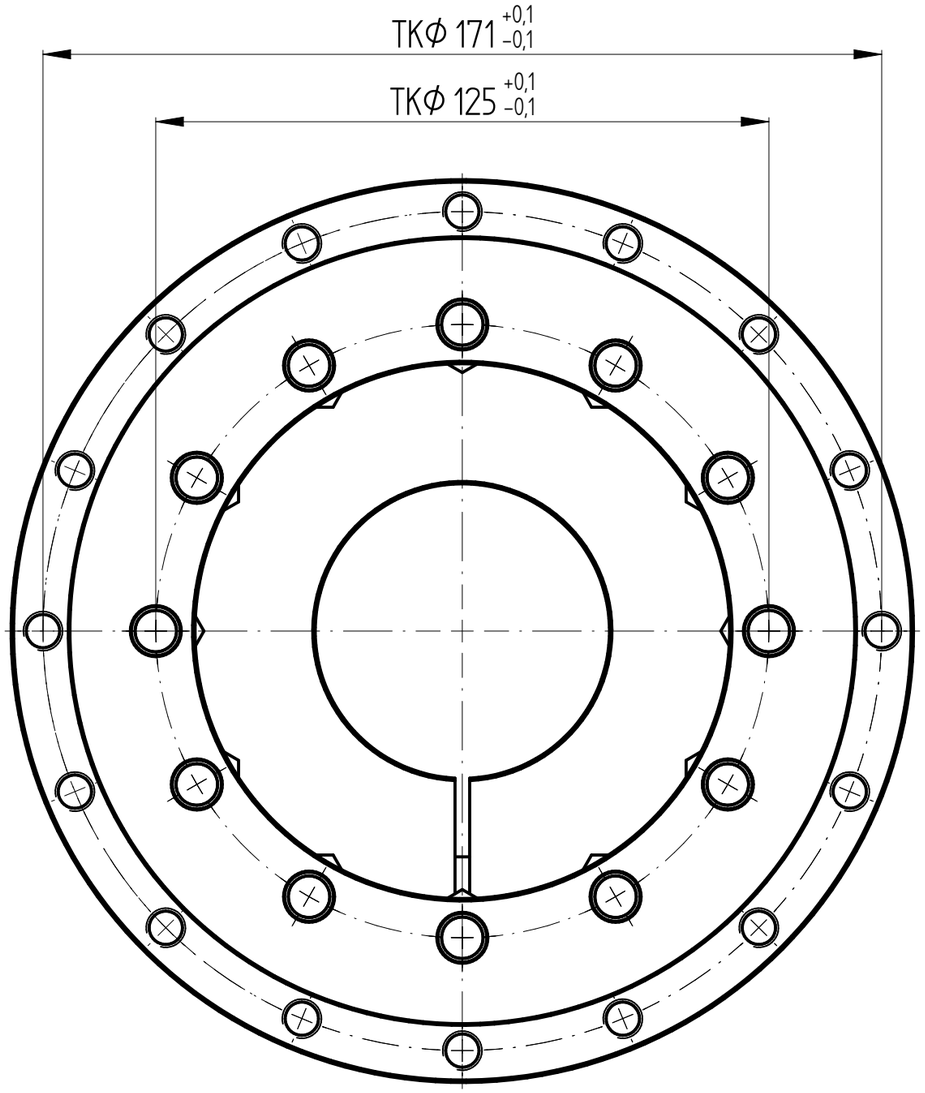
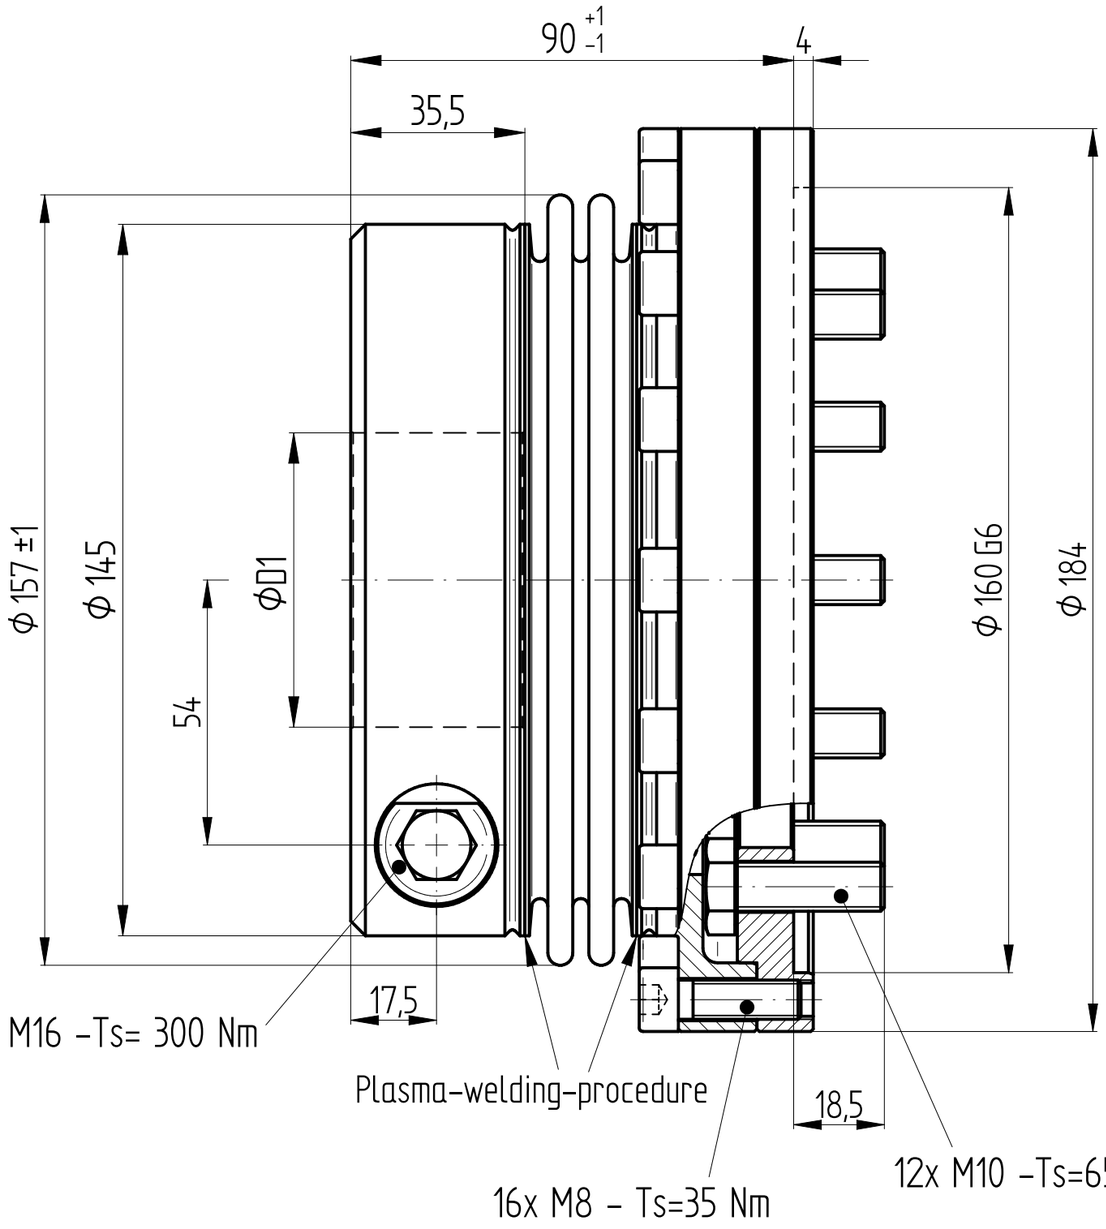



<u>technical data</u>:
nominal torque: 1300 Nm
maximum torque: 2600 Nm
torsional stiffness: 400 Nm/arcmin
moment of inertia: 0,033 kgm²
max. axial shaft displacement: ± 0,4 mm
max. lateral shaft displacement: 0,1 mm
axial spring rate: 310 N/mm
lateral spring rate: 13.000 N/mm
temperature range: –40° up to +300°C
D1 min/max = Φ45 / Φ90 mm
mass: approx. 7,3 kg
ISO 9409 interface: A–125

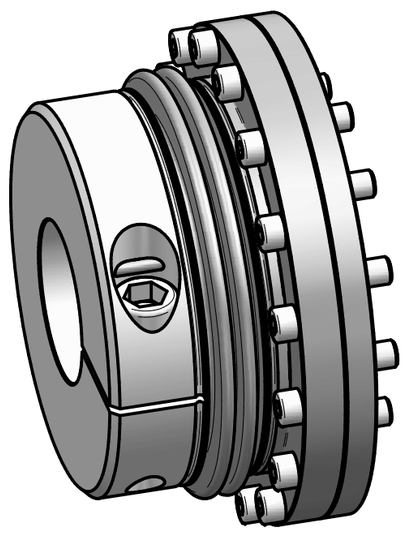

<u>material</u>:
bellows: stainless steel 1.4571
flange ring: heat treated steel – carbonized
clampinghub / flangehub: Steel (St 52)
clamping screws: ISO 4762 – 12.9
ISO 4017 – 10.9

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | Änderung | | | | Werkstoffbezeichnung: - | Werkstoffnummer: - |
| | | | | | | Maßstab: 0,8 | |
| | | | | | | Rohteil-/Vorteilnummer: - | Gewicht: - kg |
| | | gepr. | 12.03.20 | AR | | metal bellows coupling KGE 1300 - 2W | |
| Passung | Abmaß | gez. | 10.03.20 | Be | | Benennung | |
| DIN ISO 13715 -0,4 +0,8 | DIN ISO 2768-mK: 0,5 ... 6 ± 0,1; 6 ... 30 ± 0,2; 30 ... 120 ± 0,3; 120 ... 315 ± 0,5; 315 ...1000 ± 0,8 | Datum | | Name | | Format A3 | MB-046 23756 -e |
| | | JAKOB Antriebstechnik D-63839-Kleinwallstadt | | | | Identnummer | |
| | | | | | | Ersatz für - | ersetzt durch - |

Eigentumsrechte, Urheberrechte und Vervielfatigungsverbot beachten, siehe auch DIN 34.