

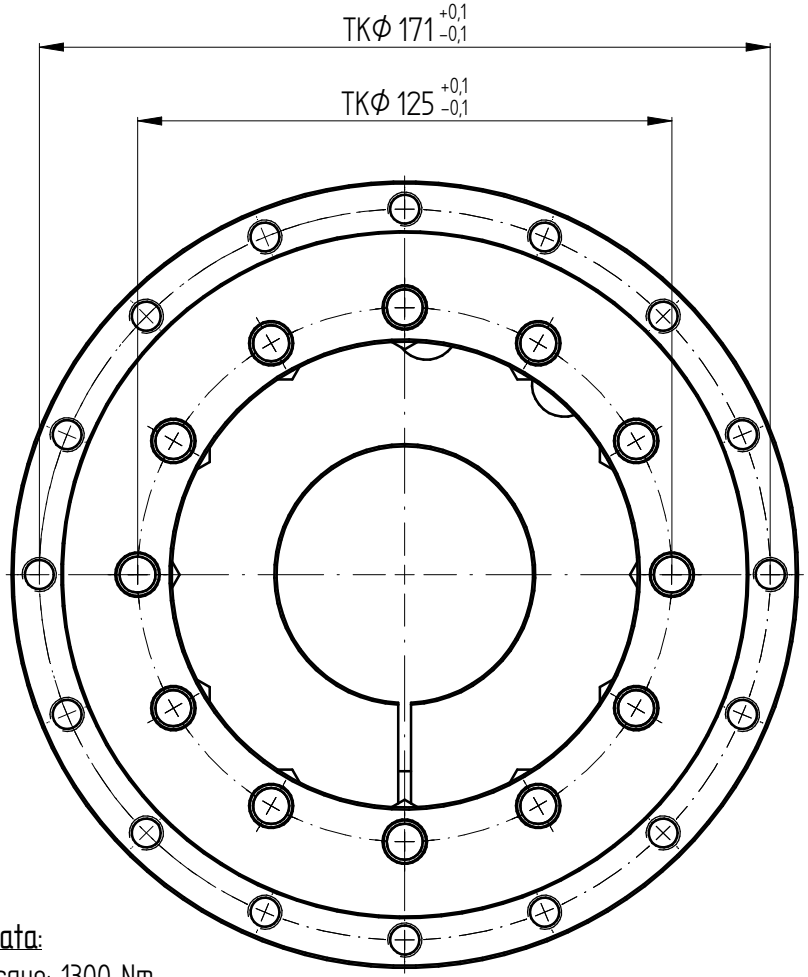


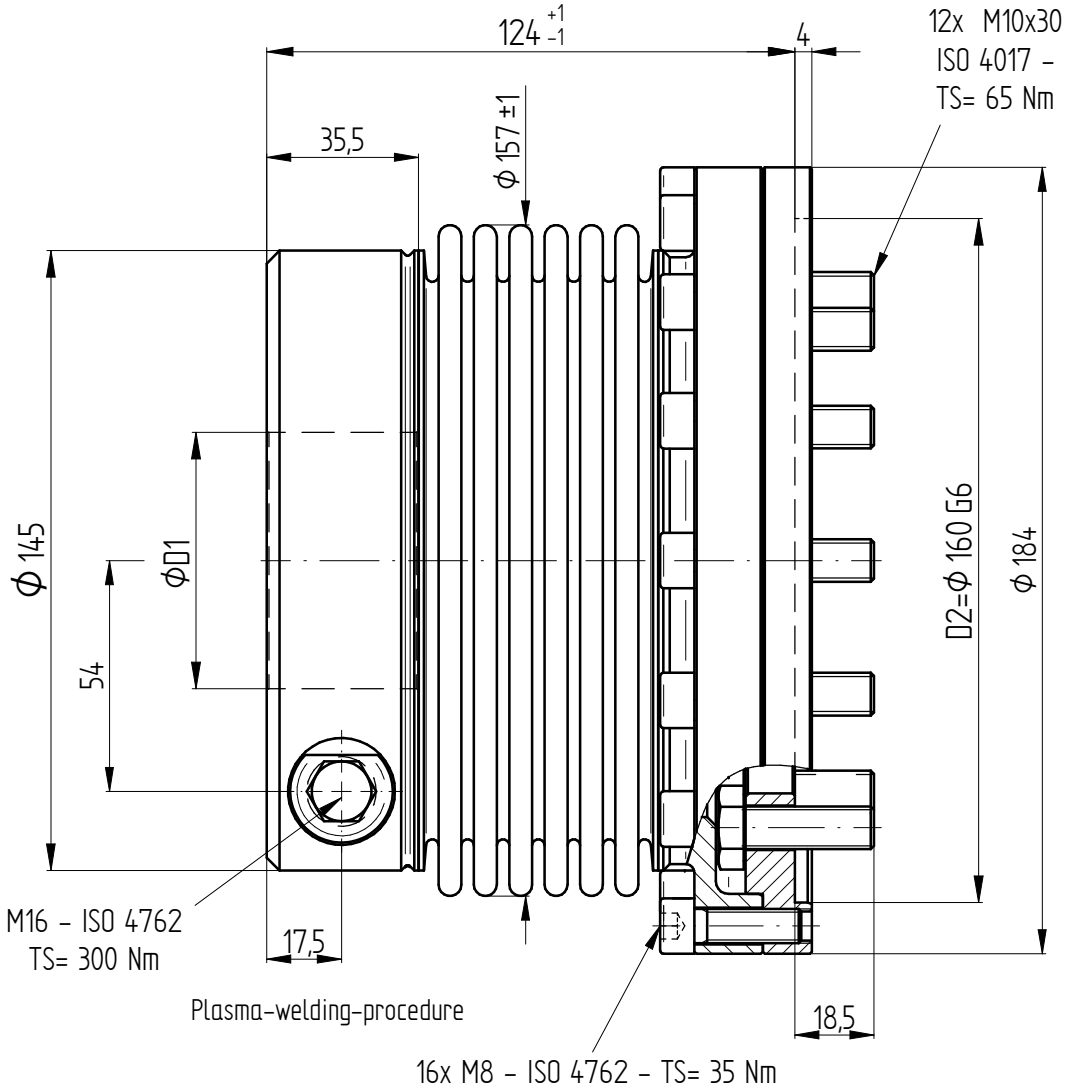

<u>technical data</u>:

nominal torque: 1300 Nm
maximum torque: 2600 Nm
torsional stiffness: 210 Nm/arcmin
moment of inertia: 0,034 kgm²
max. axial shaft displacement: ± 1 mm
max. lateral shaft displacement: 0,3 mm
axial spring rate: 200 N/mm
lateral spring rate: 1400 N/mm
temperature range: -40° up to +300°C
D1 min/max = Φ45 / Φ90 mm
mass: approx. 7,5 kg
ISO 9409 interface: A-125

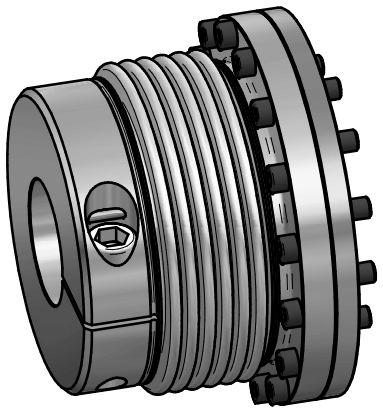

<u>material</u>:

bellows: stainless steel 1.4571
flange ring: heat treated steel - carbonized
clampinghub / flangehub: Steel (St 52)
clamping screws: ISO 4762 - 12.9
ISO 4017 - 10.9

Änderung				Werkstoffbezeichnung	Werkstoffnummer	Maßstab
				-	-	1:1,25
				Rohteil-/Vorteilnummer	Gewicht	
				-	8,0 kg	
gepr.	11.06.24	AR		metal bellows coupling		
gez.	02.12.22	IA		KGE 1300 / 6W - standard		
Passung	Abmaß	Datum	Name	Benennung		
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK 0,5 ... 6 ±0,1 6 ... 30 ±0,2 30 ... 120 ±0,3 120 ... 315 ±0,5 315 ...1000 ±0,8	JAKOB Antriebstechnik D-63839-Kleinwallstadt		Format A3	MB- 046 24585-e	
				Identnummer		
				Ersatz für -	ersetzt durch -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.