

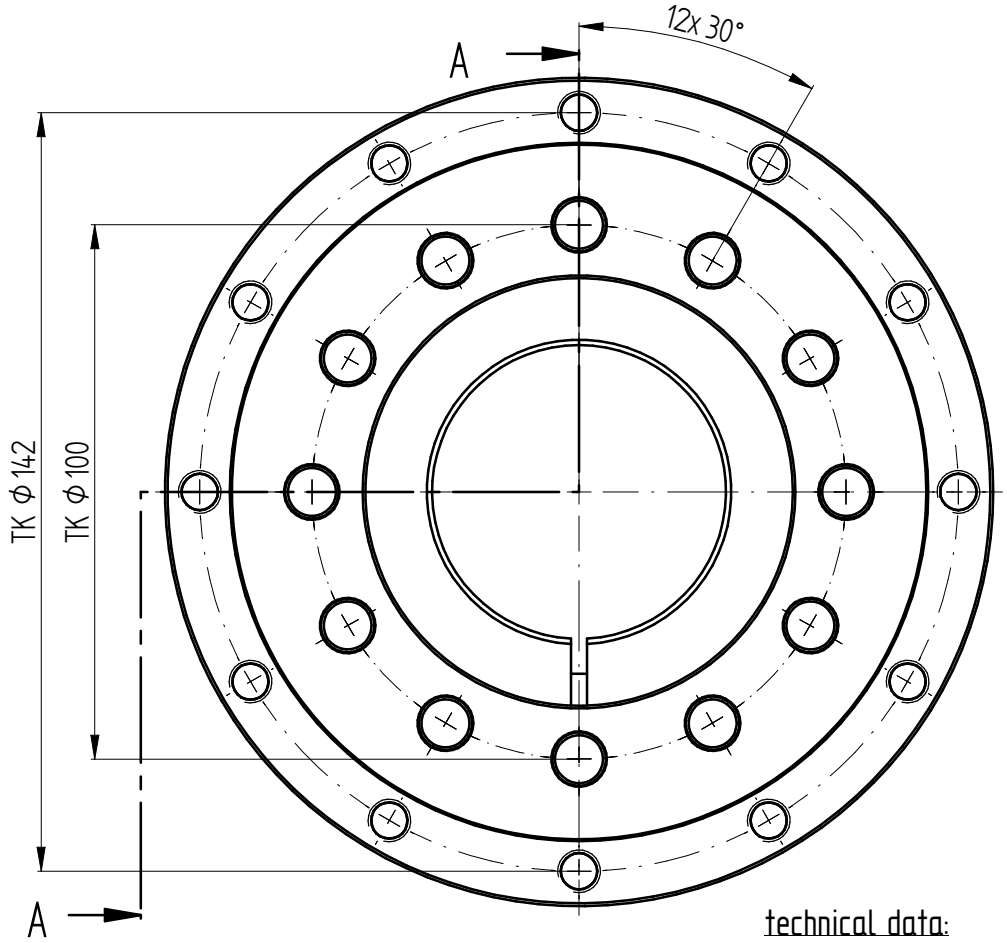


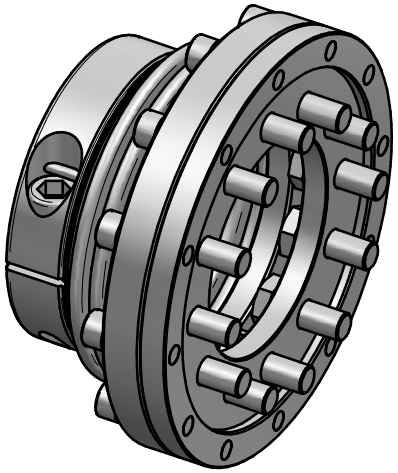

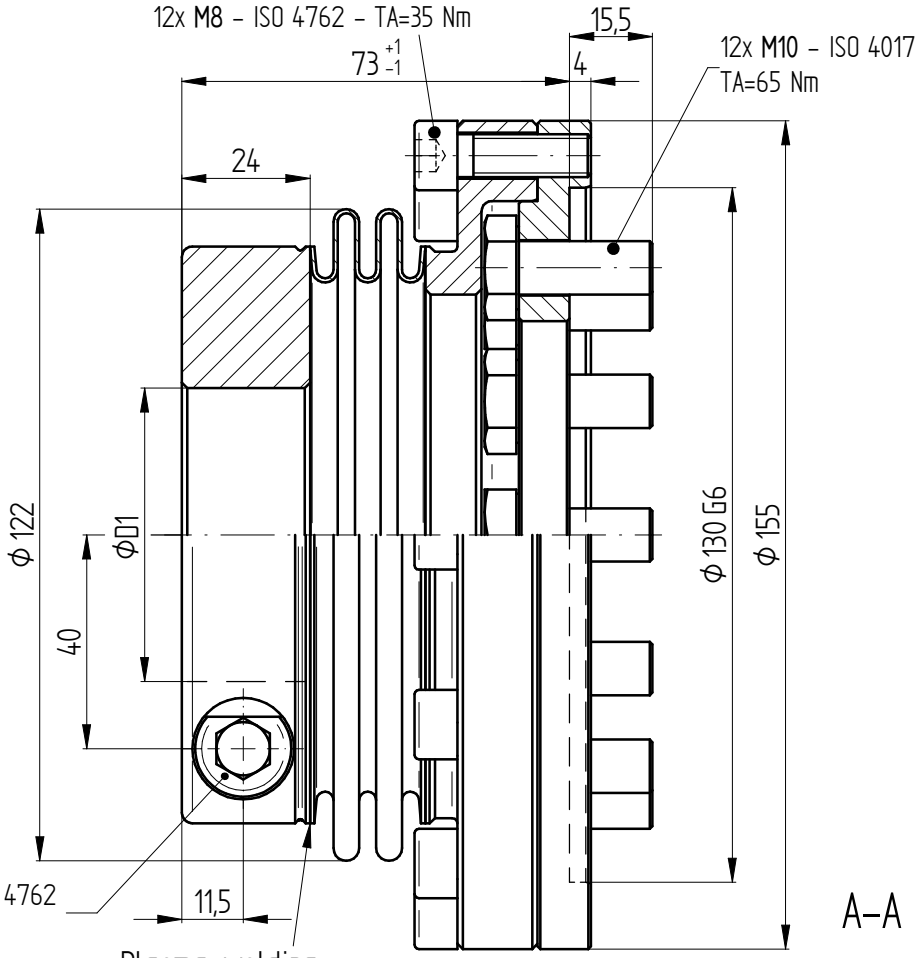

<u>technical data:</u>

nominal torque: 700 Nm
torsional stiffness: 190 Nm/arcmin
moment of inertia: 9,1 10^{-3}kgm²
max. axial shaft displacement: ± 0,4 mm
max. lateral shaft displacement: 0,1 mm
axial spring rate: 260 N/mm
lateral spring rate: 15000 N/mm
temperature range: -40° up to +300°C
D1 min/max = ϕ42 / ϕ64 mm
mass: approx. 4,3 kg
ISO 9409 interface: A-100

<u>material:</u>

bellows: stainless steel 1.4571
flange ring: heat treated steel – carbonized
clampinghub / flangehub: Steel (St 52)
clamping screws: ISO 4762 – 12.9
ISO 4017 – 10.9

		Änderung				Werkstoffbezeichnung	Werkstoffnummer	Maßstab
						-	-	1:1
						Rohteil-/Vorteilnummer	Gewicht	
						-	- kg	
		gepr.				metal bellows coupling KGE 700 / 2W		
Passung	Abmaß	gez.	02.11.15	Be				
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK	Datum	Name			Benennung		
	0,5 ... 6 ±0,1 6 ... 30 ±0,2 30 ... 120 ±0,3 120 ... 315 ±0,5 315 ...1000 ±0,8	JAKOB Antriebstechnik D-63839-Kleinwallstadt				Format A3	MB - 046 21773-e	
						Artikelnummer		
						Ersatz für -	ersetzt durch -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.