

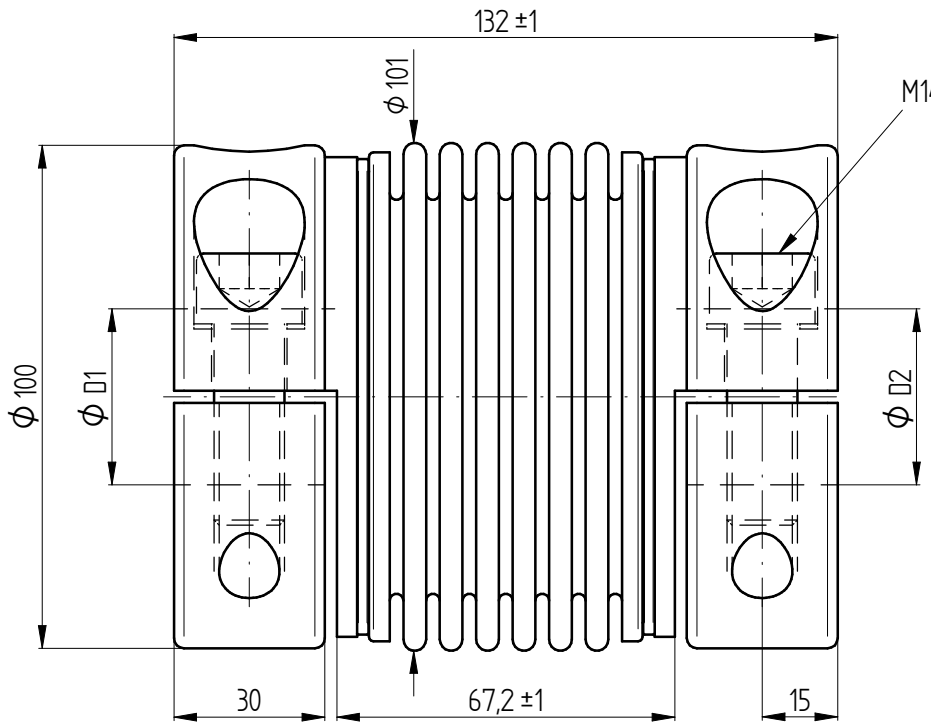


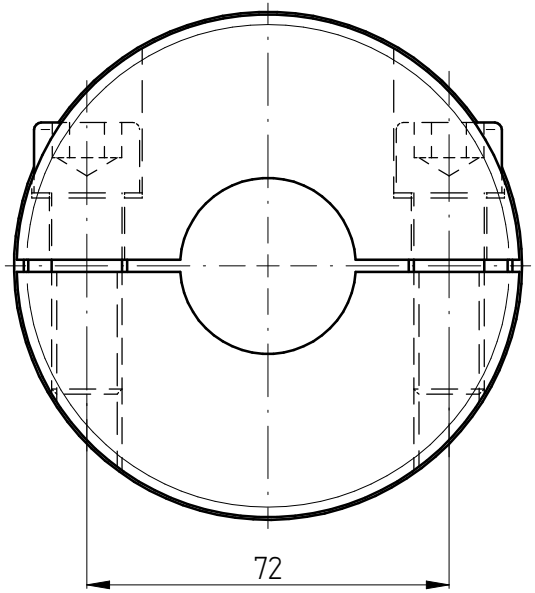

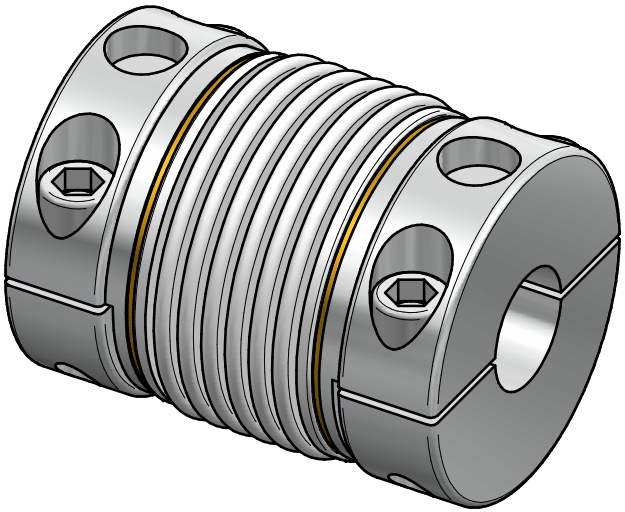

technical data:
nominal torque: 400 Nm
maximum torque: 600 Nm
torsional stiffness: 47 Nm/arcmin
moment of inertia: 3,0 x 10^{-3} kgm²
max. axial shaft displacement: ± 1,0 mm
max. lateral shaft displacement: 0,3 mm
axial spring rate: 100 N/mm
lateral spring rate: 640 N/mm
temperature range: -40° up to +200°C
D1/2min/max = Φ24 / Φ55 mm
mass: approx. 2,0 kg

material:
bellows: stainless steel
hubs: high-tensile strength aluminum
screws: ISO 4762 / 12.9
press-fit wire: brass

		Änderung			Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 1:1
					Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.	24.10.23	IA	Metal bellows coupling KMH 400 - standard		
Passung	Abmaß	gez.	15.05.17	Be			
DIN ISO 13715	DIN ISO 2768-mK		Datum	Name	Benennung		
-0,4 / +0,8	0,5 ... 6 ± 0,1 6 ... 30 ± 0,2 30 ... 120 ± 0,3 120 ... 315 ± 0,5 315 ...1000 ± 0,8		JAKOB Antriebstechnik D-63839-Kleinwallstadt		Format A3 / Artikelnummer: MB - 158 21638-e		
					Ersatz für: -	ersetzt durch: -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.