

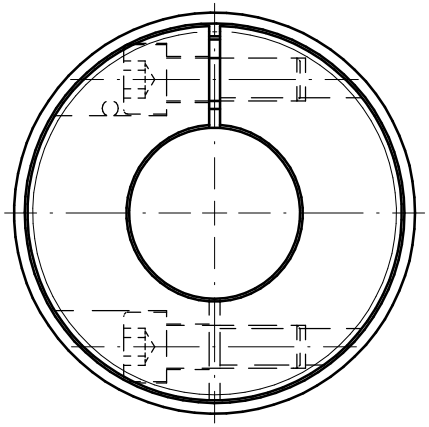


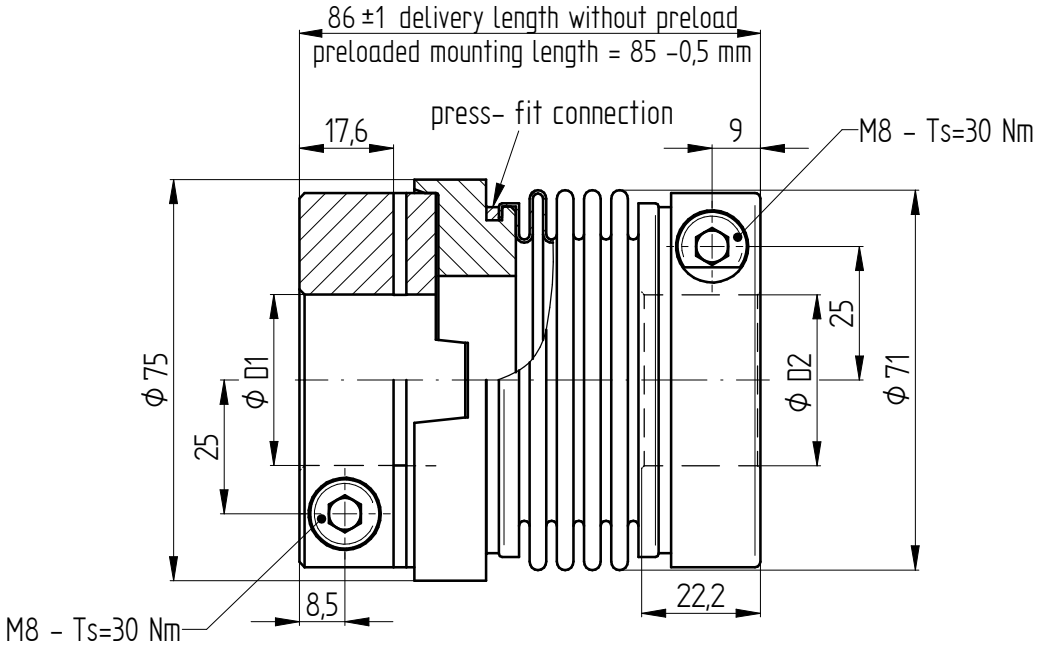

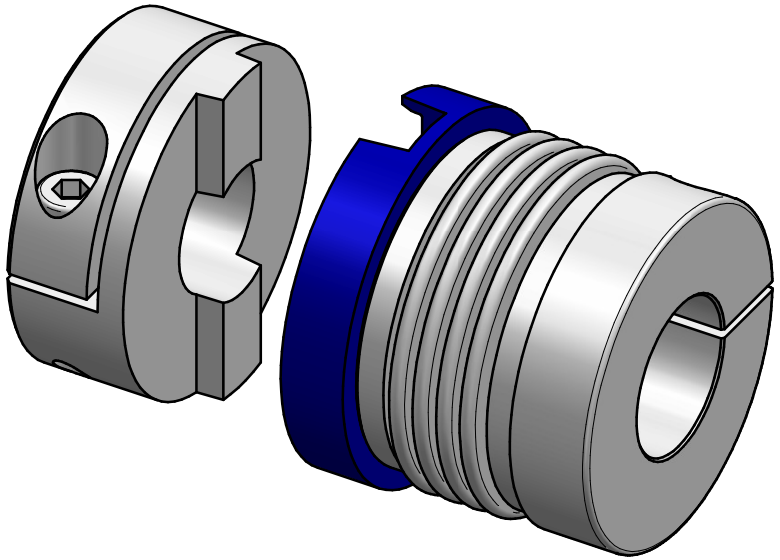

technical data:

nominal torque: 100 Nm
maximum torque: 150 Nm
torsional stiffness 12 Nm/arcmin
moment of inertia: 0,46 10^{-3}kgm²
max. axial shaft displacement: ± 0,6 mm
max. lateral shaft displacement: 0,2 mm
axial spring rate: 120 N/mm
lateral spring rate: 1200 N/mm
temperature range: -40° up to +200°C
D1/D2min/max = ϕ14 / ϕ38 mm
max. speed: max. 13.000 rpm
mass: approx. 0,66 kg

material:

bellows: stainless steel
hubs: high-tensile strength aluminium
clamping screws: ISO 4762 - 12.9
press-fit wire: brass

		Änderung				Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 1:1
						Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.	18.09.23	IA		Metal bellows coupling		
Passung	Abmaß	gez.	12.05.17	Be		KPP 100 - standard		
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK: 0,5 ... 6 ±0,1; 6 ... 30 ±0,2; 30 ... 120 ±0,3; 120 ... 315 ±0,5; 315 ...1000 ±0,8	Datum	Name	Benennung				
		JAKOB Antriebstechnik D-63839-Kleinwallstadt		Format A3	Artikelnummer: MB-120 16540-e			
				Ersatz für: -	ersetzt durch: -			

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.