

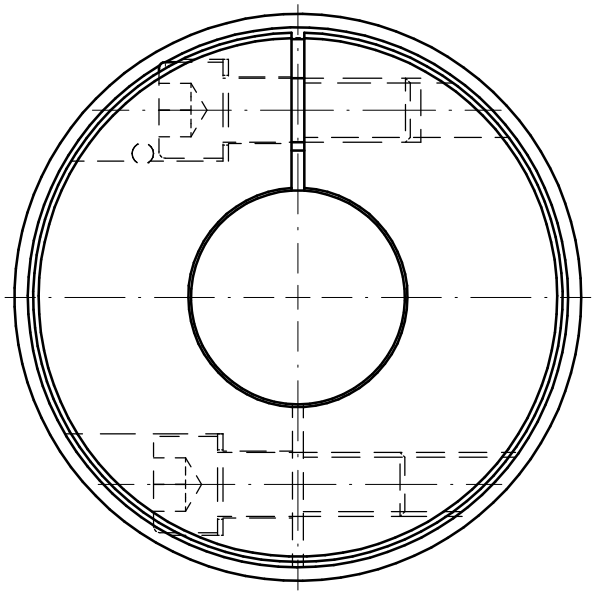


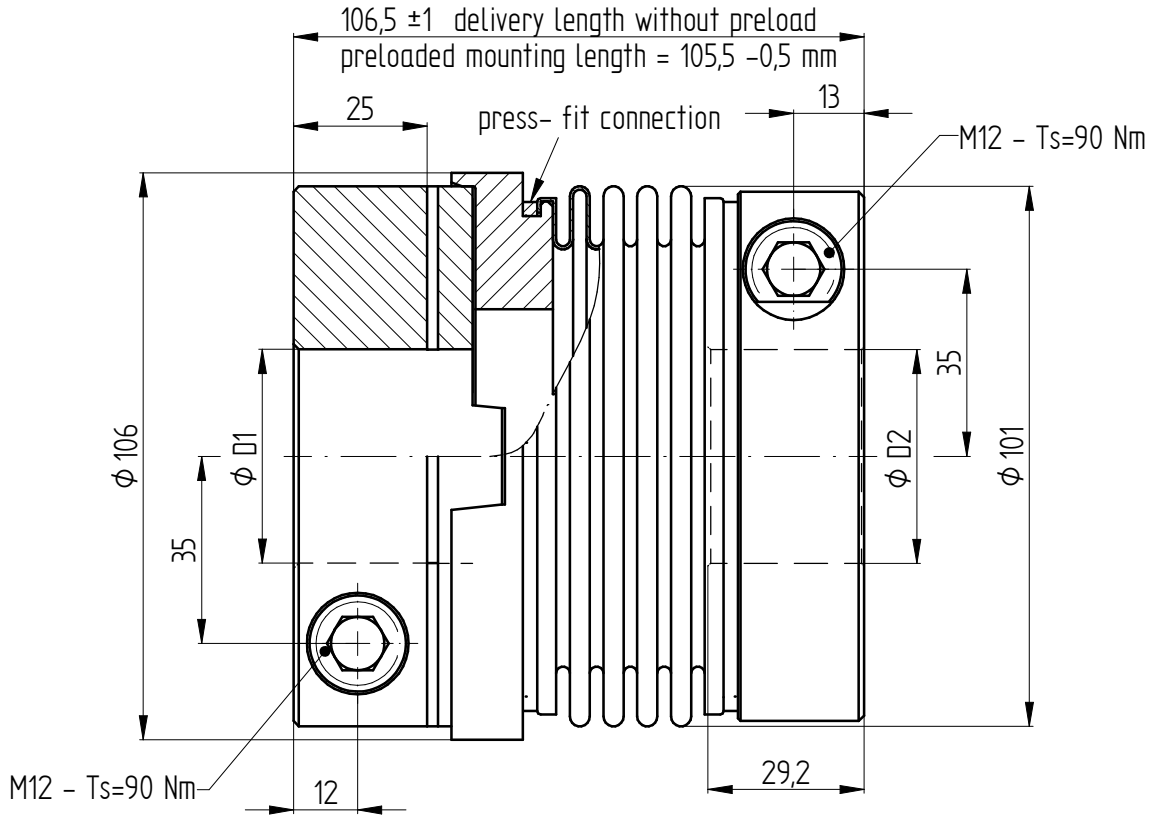

technical data:

nominal torque: 270 Nm
maximum torque: 400 Nm
torsional stiffness 31 Nm/arcmin
moment of inertia: 0,0022 kgm²
max. axial shaft displacement: ± 0,8 mm
max. lateral shaft displacement: 0,2 mm
axial spring rate: 95 N/mm
lateral spring rate: 1350 N/mm
temperature range: -40° up to +200°C
D1/D2min/max = ϕ25 / ϕ55 mm
mass: approx. 1,6 kg
max. speed: max. 9.500 rpm

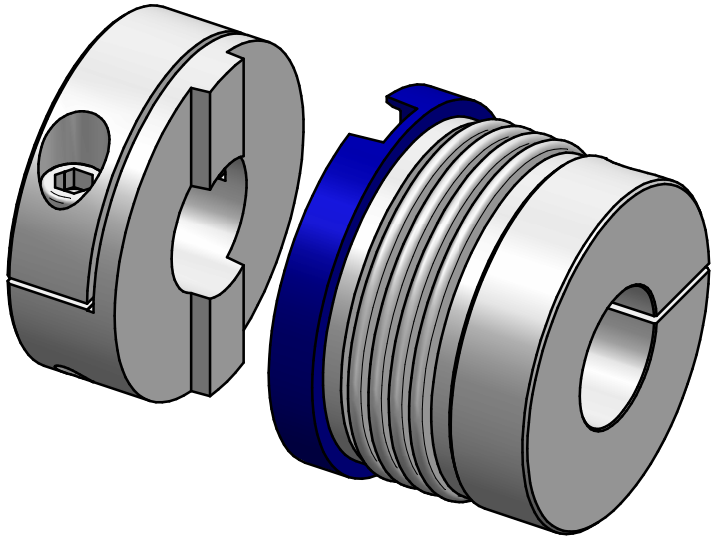

material:

bellows: stainless steel
hubs: high-tensile strength aluminium
clamping screws: ISO 4762 - 12.9
press-fit wire: brass

		Änderung			Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 1:1
					Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.	18.09.23	IA	Metal bellows coupling		
Passung	Abmaß	gez.	12.05.17	Be	KPP 270 - standard		
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK: 0,5 ... 6 ±0,1; 6 ... 30 ±0,2; 30 ... 120 ±0,3; 120 ... 315 ±0,5; 315 ...1000 ±0,8	Datum		Name	Benennung		
		JAKOB Antriebstechnik D-63839-Kleinwallstadt			Format A3	Artikelnummer: MB-120 16542-e	
					Ersatz für: -	ersetzt durch: -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.