
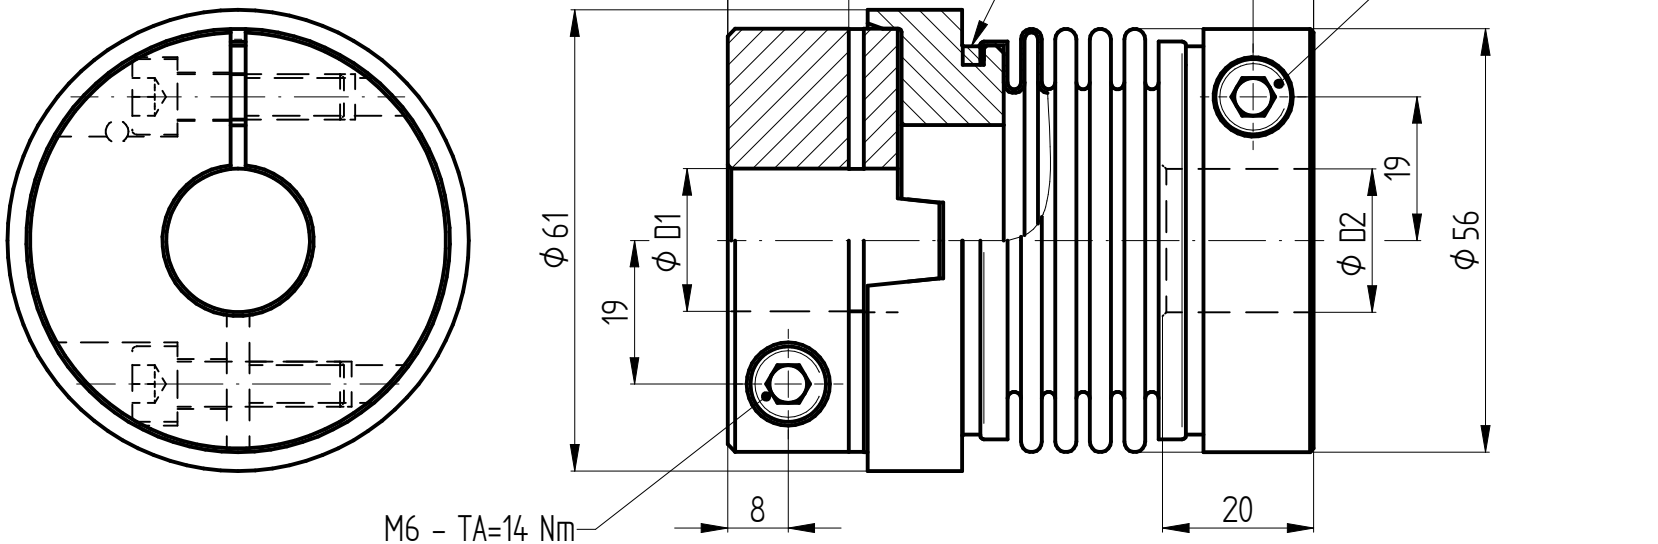


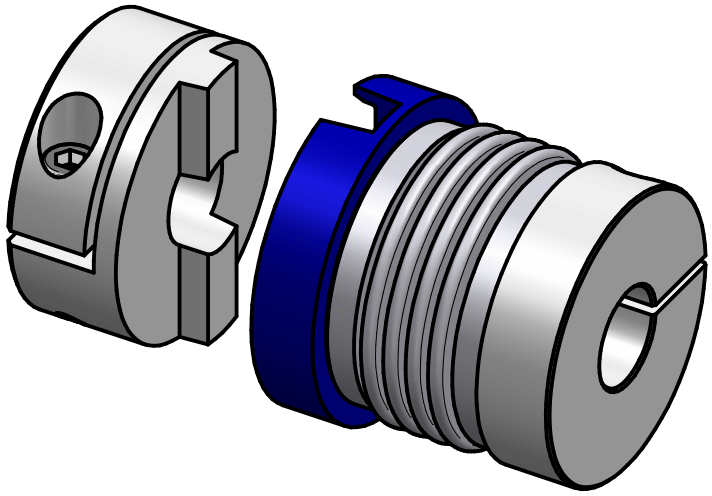

technical data:

nominal torque: 35 Nm
maximum torque: 50 Nm
torsional stiffness: 5,6 Nm/arcmin
moment of inertia: 0,17 10^{-3}kgm²
max. axial shaft displacement: ± 0,5 mm
max. lateral shaft displacement: 0,2 mm
axial spring rate: 70 N/mm
lateral spring rate: 480 N/mm
temperature range: -40° up to +200°C
D1/D2min/max = ϕ10 / ϕ30 (ϕ32) mm
max. speed: max. 17.000 rpm
mass: approx. 0,38 kg

material:

bellows: stainless steel
hubs: high-tensile strength aluminium
clamping screws: ISO 4762 - 12.9
press-fit wire: brass

		Änderung				Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 1:1
						Rohteil-/Vorteilnummer: -	Gewicht: - kg	
			gepr.	17.07.23	IA	Metal bellows coupling KPP 35 - standard		
Passung	Abmaß		gez.	12.05.17	Be			
DIN ISO 13715	DIN ISO 2768-mK		Datum		Name	Benennung		
-0,4 / +0,8	0,5 ... 6 ±0,1; 6 ... 30 ±0,2; 30 ... 120 ±0,3; 120 ... 315 ±0,5; 315 ...1000 ±0,8					Format A4	MB-120 16538-e	
		JAKOB Antriebstechnik D-63839-Kleinwallstadt				Artikelnummer		
						Ersatz für -	ersetzt durch -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.