

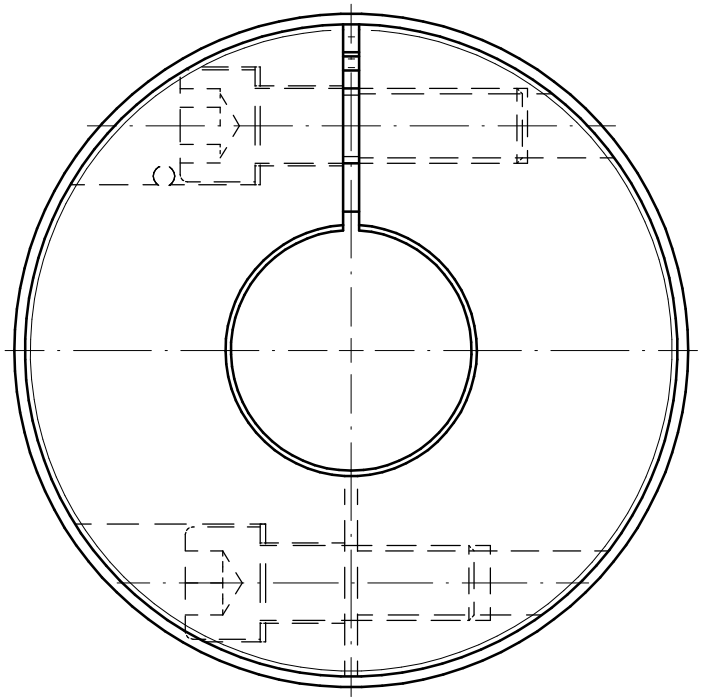


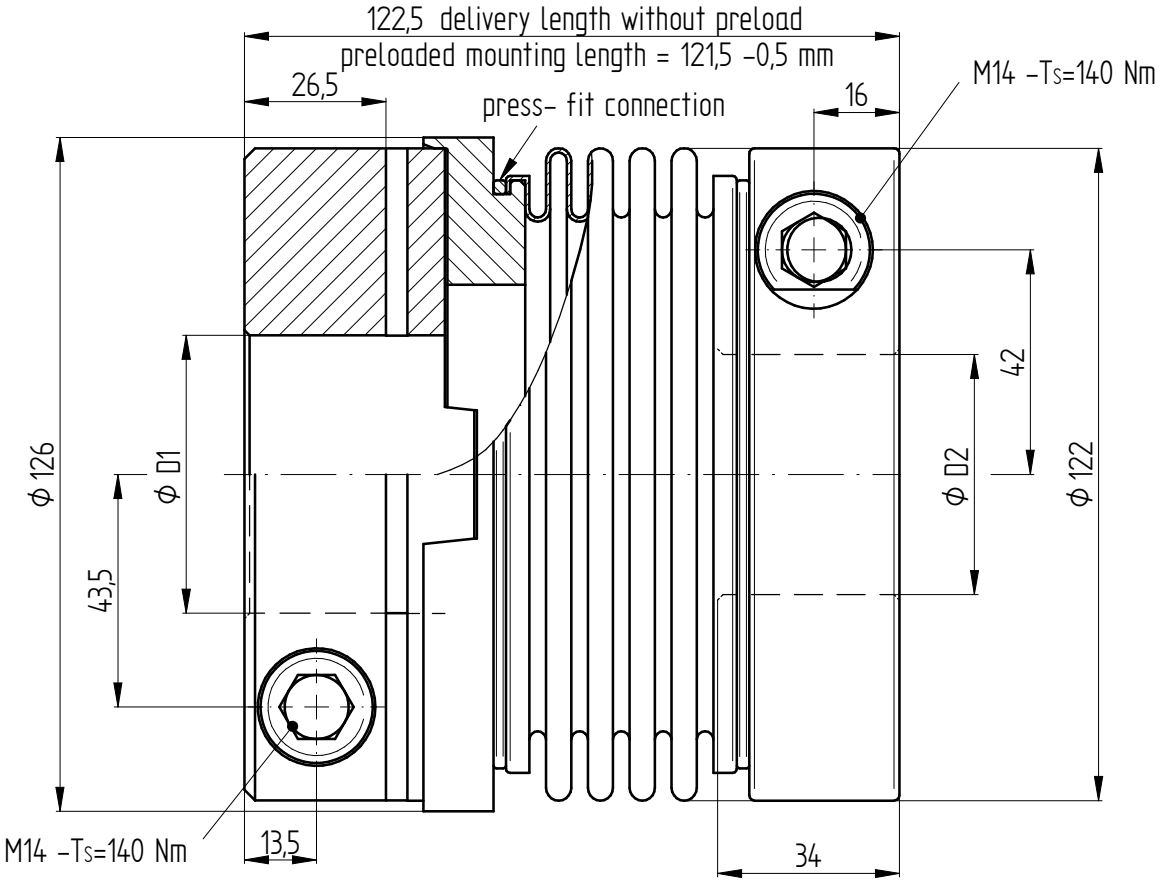

technical data:

nominal torque: 600 Nm
maximum torque: 900 Nm
torsional stiffness 67 Nm/arcmin
moment of inertia: 0,0058 kgm²
max. axial shaft displacement: ± 0,7 mm
max. lateral shaft displacement: 0,2 mm
axial spring rate: 145 N/mm
lateral spring rate: 3000 N/mm
temperature range: -40° up to +200°C
max. operation speed: 8000 rpm
D1/D2min/max = Φ32 / Φ68 mm
mass: approx. 2,7 kg

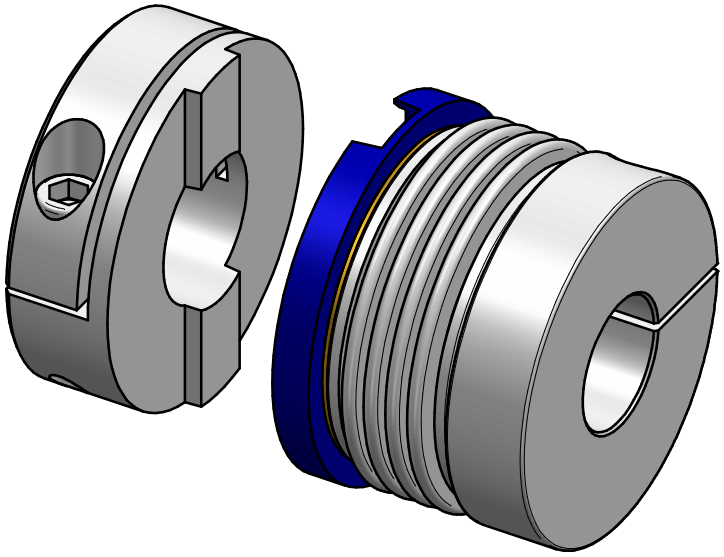

material:

bellows: stainless steel
hubs: high-tensile strength aluminium
clamping screws: ISO 4762 - 12.9
press-fit wire: brass

		Änderung			Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 1:1
					Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.	19.09.23	IA	Metal bellows coupling		
Passung	Abmaß	gez.	12.05.17	Be	KPP 600 - standard		
DIN ISO 13715	DIN ISO 2768-mK	Datum		Name	Benennung		
-0,4 / +0,8	0,5 ... 6 ± 0,1 6 ... 30 ± 0,2 30 ... 120 ± 0,3 120 ... 315 ± 0,5 315 ... 1000 ± 0,8	JAKOB Antriebstechnik D-63839-Kleinwallstadt			Format A3 Artikelnummer MB-120 20682-e		
					Ersatz für -	ersetzt durch -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.