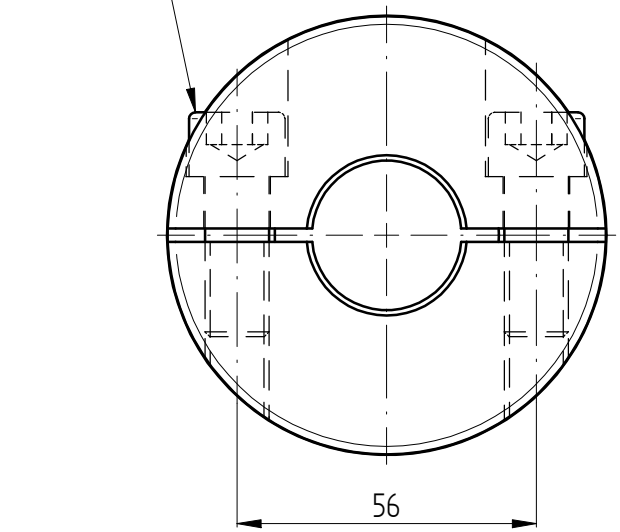

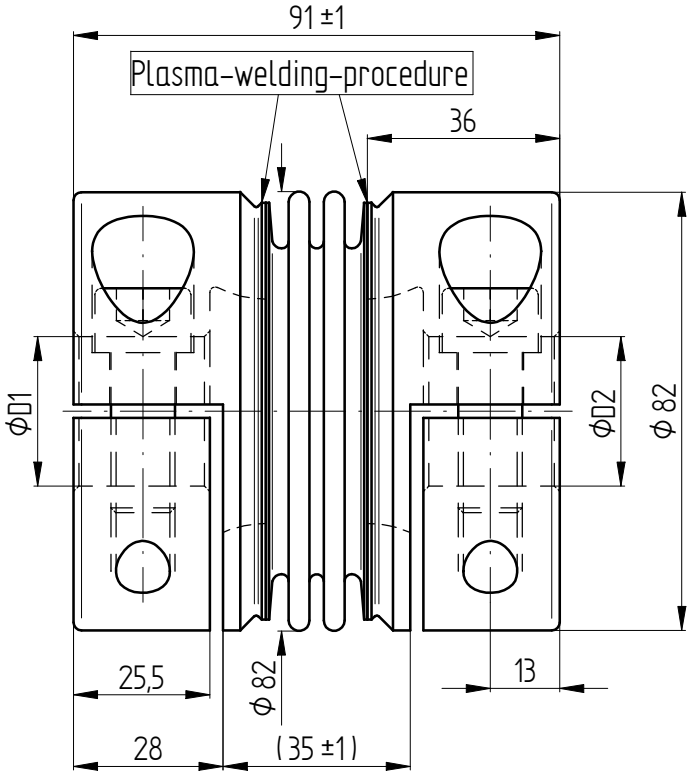

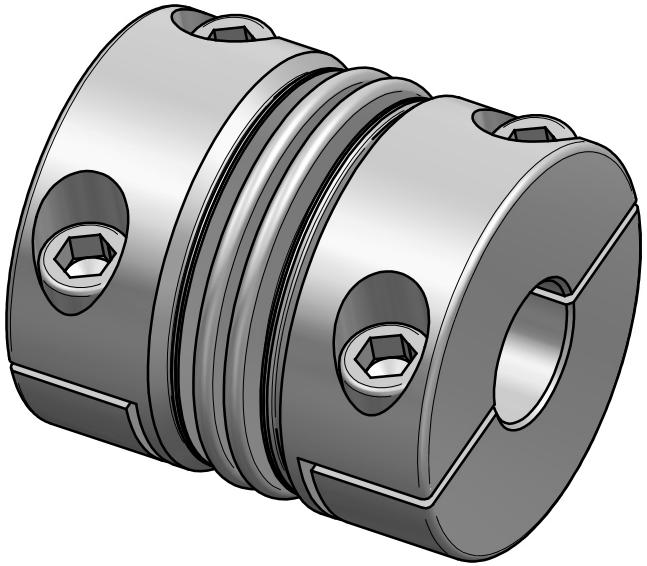

technical data:

nominal torque: 200 Nm
maximum torque: 400 Nm
torsional stiffness: 50 Nm/arcmin
moment of inertia: 2,2 10^{-3} kgm²
max. axial shaft displacement: ± 0,4 mm
max. lateral shaft displacement: 0,1 mm
axial spring rate: 170 N/mm
lateral spring rate: 5000 N/mm
temperature range: -40° up to +350°C
D1/2 min/max = Φ22 / Φ42 mm
mass: approx. 2,5 kg

material:

bellows: stainless steel 1.4571 / A4
hubs: stainless steel 1.4301 / A2
clamping screws: stainless steel A4-80
(optional: ISO 4762 – 12.9)

		Änderung			Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 1:1
					Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.			metal bellows coupling KGH-VA 200 / 2W - standard		
Passung	Abmaß	gez.	13.03.17	Be	Benennung		
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK: 0,5 ... 6 ±0,1; 6 ... 30 ±0,2; 30 ... 120 ±0,3; 120 ... 315 ±0,5; 315 ...1000 ±0,8		Datum	Name	Format A3	MB - 029 22981 - e	
			JAKOB Antriebstechnik D-63839-Kleinwallstadt		Artikelnummer		
					Ersatz für: -	ersetzt durch: -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.