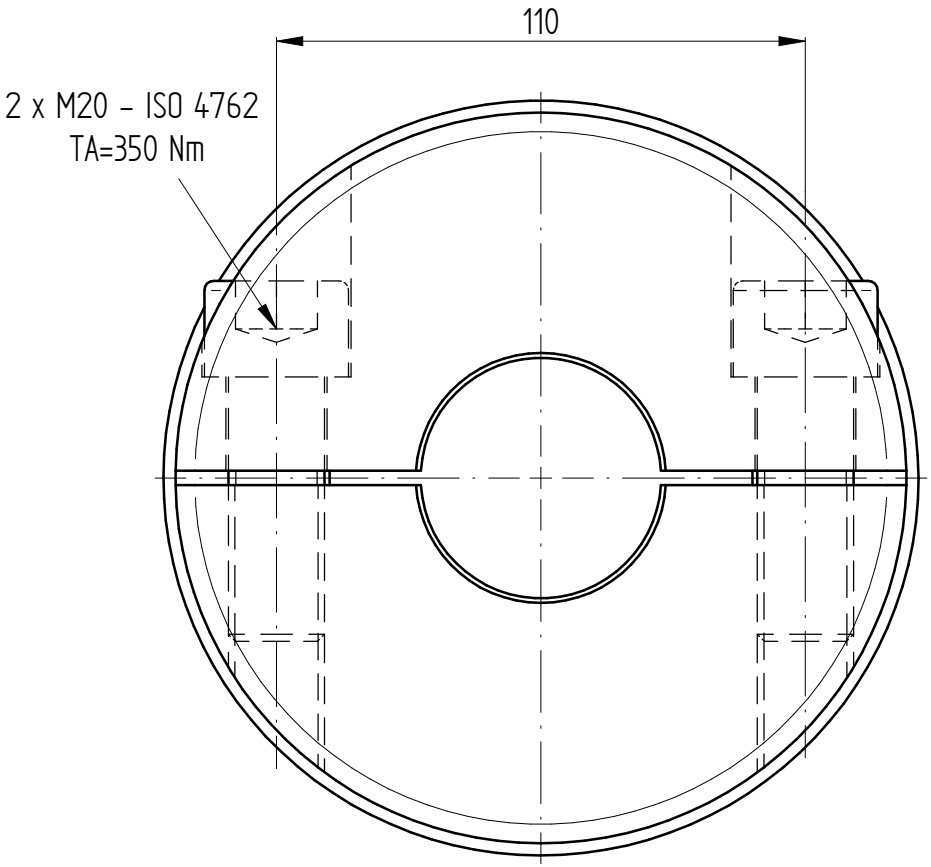

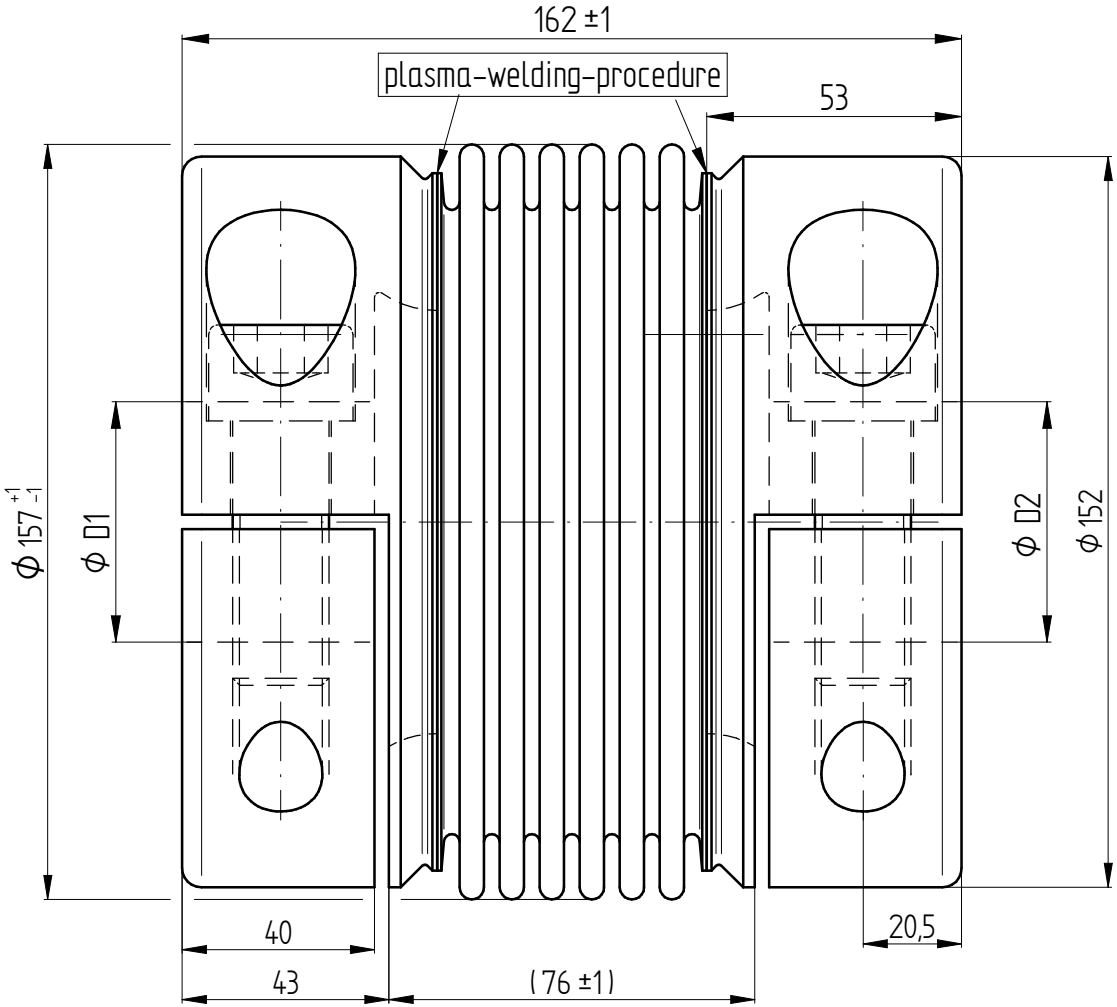

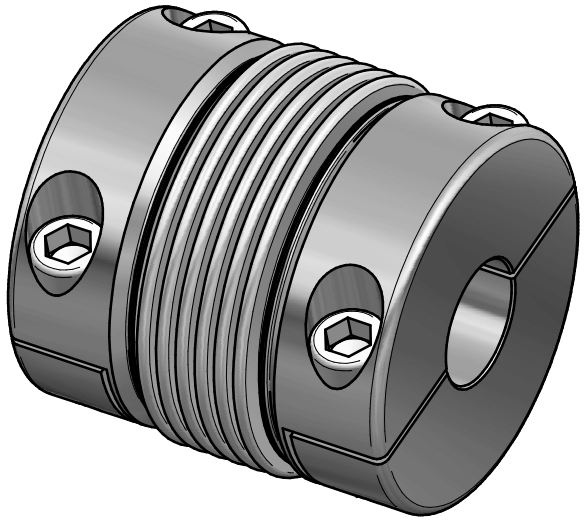

technical data:
nominal torque: 1200 Nm
maximum torque: 2400 Nm
torsional stiffness: 170 Nm/arcmin
moment of inertia: 0,039 kgm²
max. axial shaft displacement: ± 1 mm
max. lateral shaft displacement: 0,3 mm
axial spring rate: 120 N/mm
lateral spring rate: 920 N/mm
D1/2 min/max = ϕ48 / ϕ85 mm
mass: approx. 12,6 kg
temperature range: -40° up to +350°C

material:
bellows: stainless steel 1.4571 / A4
hubs: stainless steel 1.4301 / A2
clamping screws: stainless steel A4-80
(optional: ISO 4762 – 12.9)

		Änderung			Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 0,9
					Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.	24.07.23	AR	metal bellows coupling KGH-VA 1200 / 6W		
Passung	Abmaß	gez.	21.07.23	IA			
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK: 0,5 ... 6 ±0,1; 6 ... 30 ±0,2; 30 ... 120 ±0,3; 120 ... 315 ±0,5; 315 ...1000 ±0,8		Datum	Name	Benennung		
			JAKOB Antriebstechnik D-63839-Kleinwallstadt		Format A3	MB- 029 24697- e	
					Artikelnummer		
					Ersatz für -	ersetzt durch -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.