


Lmin=194 / Lmax=3000 ±2

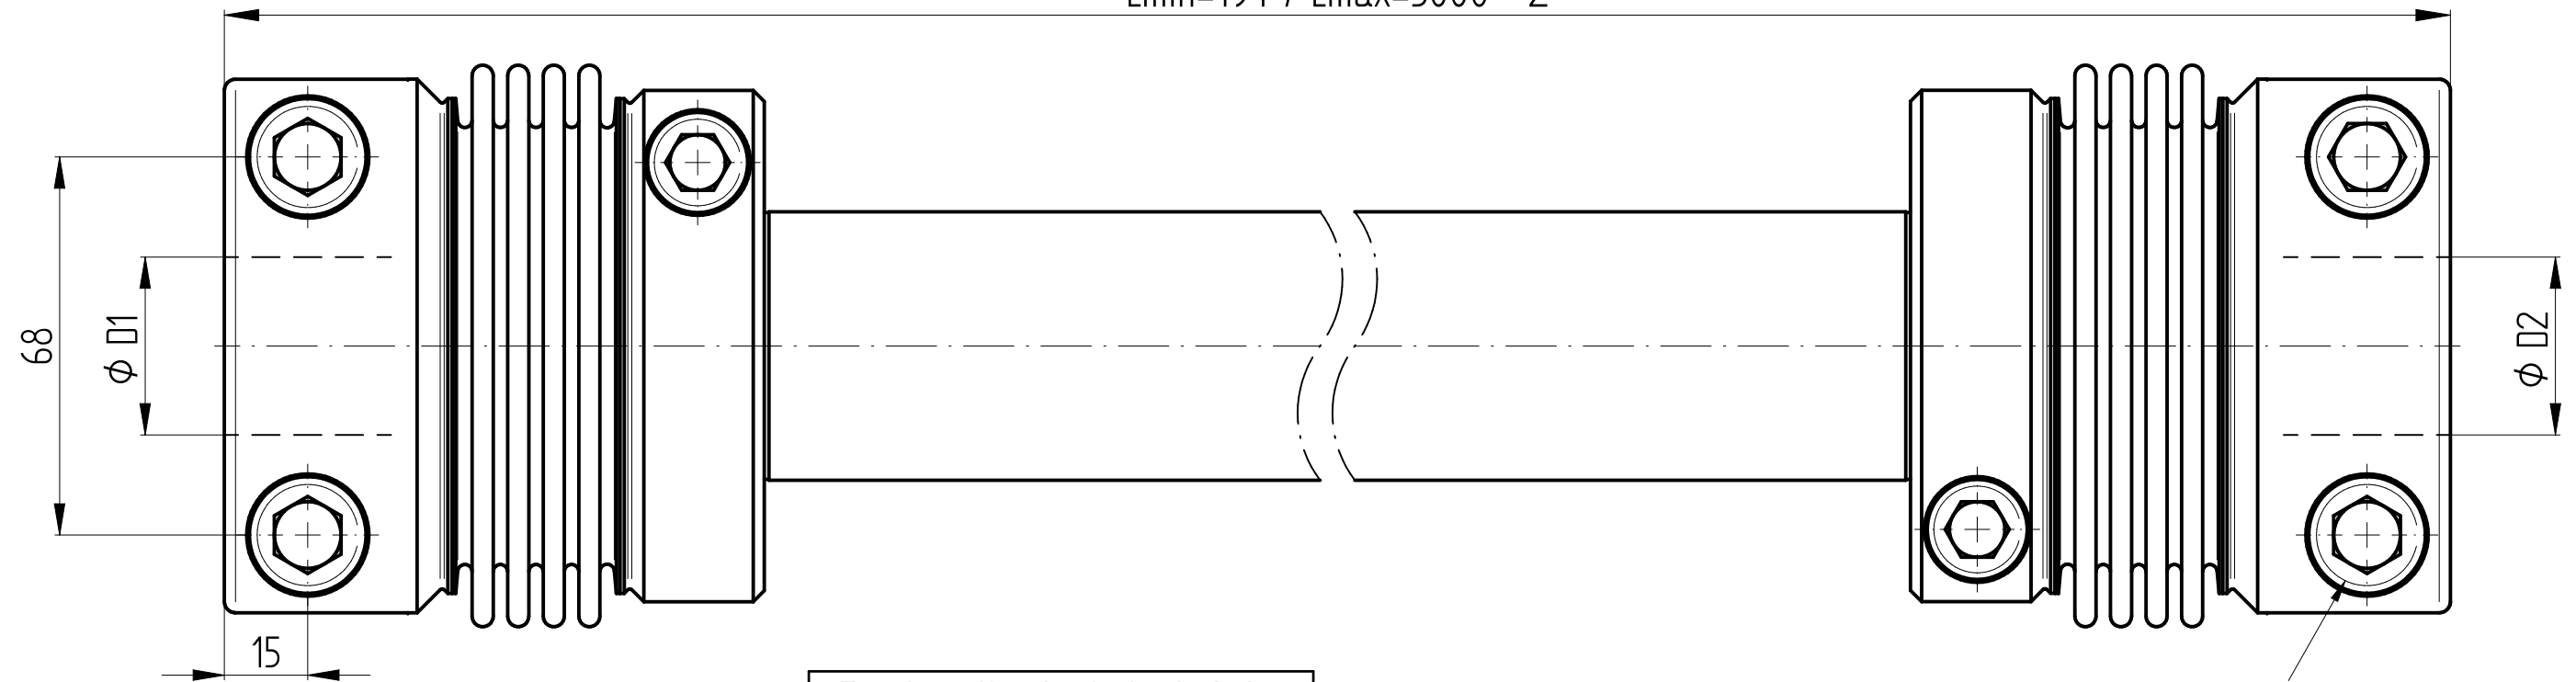

For lengthy technical data, see data sheet or on request

2x M14 - ISO 4762 - Ts=115Nm

technical Data:

- nominal torque: 350 Nm
- maximum torque: 480 Nm
- max. axial shaft displacement: ± 1,5 mm
- D1 - D2 min/max: 30/50 mm
- temperature range: -40 up to +350 °C

material:

- bellows: stainless steel 1.4571
- hubs: stainless steel 1.4301
- intermediate pipe: stainless steel
- screws: ISO 4762 stainless steel/ A4-80
- optionally 12.9 - zinc plated

| | | | | | | | | |
|---------------|-----------------|--------------------|------|----------|------|---|-----------------|---------|
| Änderung | | gepr. | | 31.03.20 | AR | Werkstoffbezeichnung | Werkstoffnummer | Maßstab |
| | | gez. | | 25.03.20 | Wu | - | - | 4:5 |
| Passung | | Abmaß | gez. | Datum | Name | Rohteil-/Vorteilnummer | Gewicht | |
| DIN ISO 13715 | DIN ISO 2768-mK | 0,5 ... 6 ± 0,1 | | | | - | - kg | |
| | | 6 ... 30 ± 0,2 | | | | Metal bellows coupling with intermediate Pipe | | |
| | | 30 ... 120 ± 0,3 | | | | WD-VA 350 - L=variable | | |
| | | 120 ... 315 ± 0,5 | | | | Benennung | | |
| | | 315 ... 1000 ± 0,8 | | | | Format A3 | | |
| - | | - | | - | | Artikelnummer | | |
| - | | - | | - | | Ersatz für | | |
| - | | - | | - | | ersetzt durch | | |

MB-140 22347- e