


$L_{min}=230 / L_{max}=3000 \pm 2$

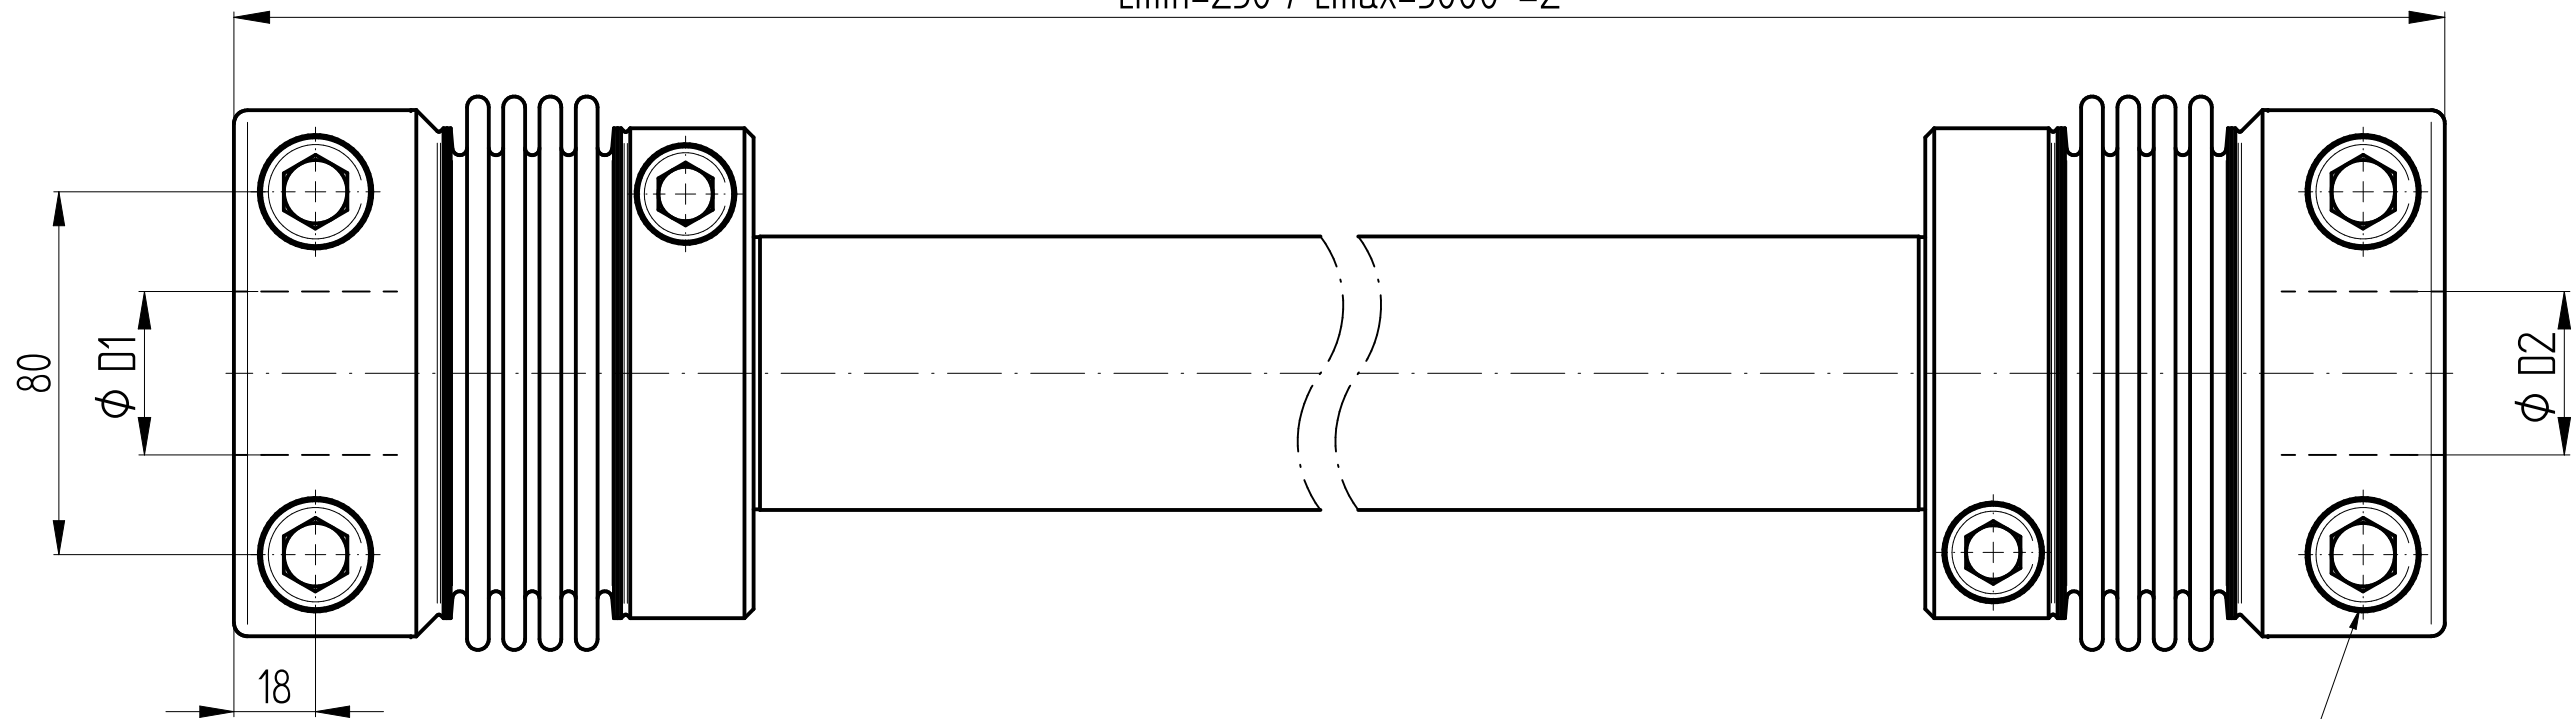

2x M16 - ISO 4762 - $T_s=180Nm$

For lengthy technical data,
see data sheet or on request

technical Data:

- nominal torque: 600 Nm
- maximum torque: 750 Nm
- max. axial shaft displacement: $\pm 1,5$ mm
- $D1 - D2$ min/max: 32/60 mm
- temperature range: -40 up to $+350$ °C

material:

- bellows: stainless steel 1.4571
- hubs: stainless steel 1.4301
- intermediate pipe: stainless steel
- screws: ISO 4762 stainless steel/ A4-80
optionally 12.9 - nickel plated

| | | | | | | | | |
|---------------|------------------------|----------|----------|------|--|---|-----------------|---------------|
| | | Änderung | | | | Werkstoffbezeichnung | Werkstoffnummer | Maßstab |
| | | | | | | - | - | 0,6 |
| | | | | | | Rohteil-/Vorteilnummer | Gewicht | |
| | | | | | | - | - kg | |
| | | | | | | Metal bellows coupling with intermediate pipe | | |
| | | | | | | WD-VA 600 - L=variable | | |
| | | | | | | Benennung | | |
| | | | | | | Format A3 | | |
| | | | | | | Artikelnummer | | |
| | | | | | | MB-140 22369 -e | | |
| | | | | | | Ersatz für | | ersetzt durch |
| | | | | | | - | | - |
| Passung | Abmaß | gez. | Datum | Name | | | | |
| DIN ISO 13715 | DIN ISO 2768-mK | | 25.03.20 | Wu | | | | |
| | 0,5 ... 6 $\pm 0,1$ | | | | | | | |
| | 6 ... 30 $\pm 0,2$ | | | | | | | |
| | 30 ... 120 $\pm 0,3$ | | | | | | | |
| | 120 ... 315 $\pm 0,5$ | | | | | | | |
| | 315 ... 1000 $\pm 0,8$ | | | | | | | |
| | | | | | | | | |